
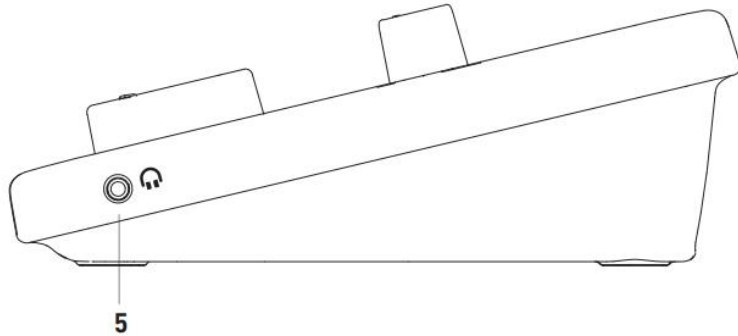



PS22 Lite-Audio Interface

PS22 Lite Functions

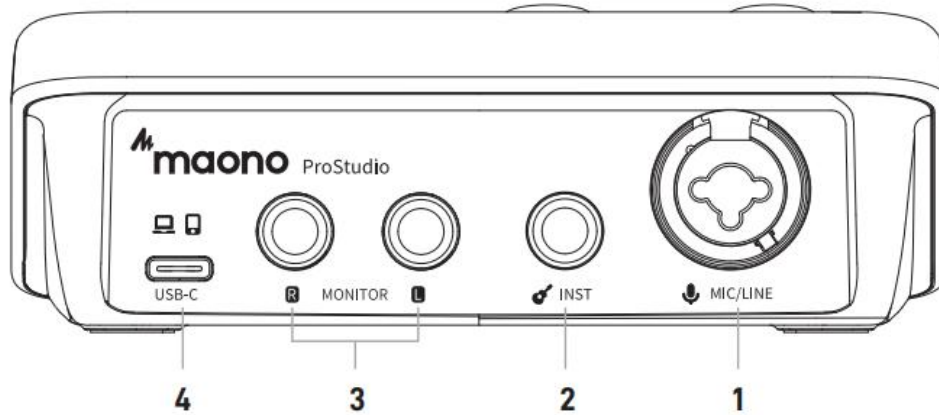

1. Mic/Line Input (MIC1) – Combo XLR socket
2. Instrument Input (MIC2)
3. Monitor Output
4. USB-C - Connects to the computer or mobile device(Provides both data transfer and power)
5. 3.5mm Headphone Jack

PS22 Lite Functions

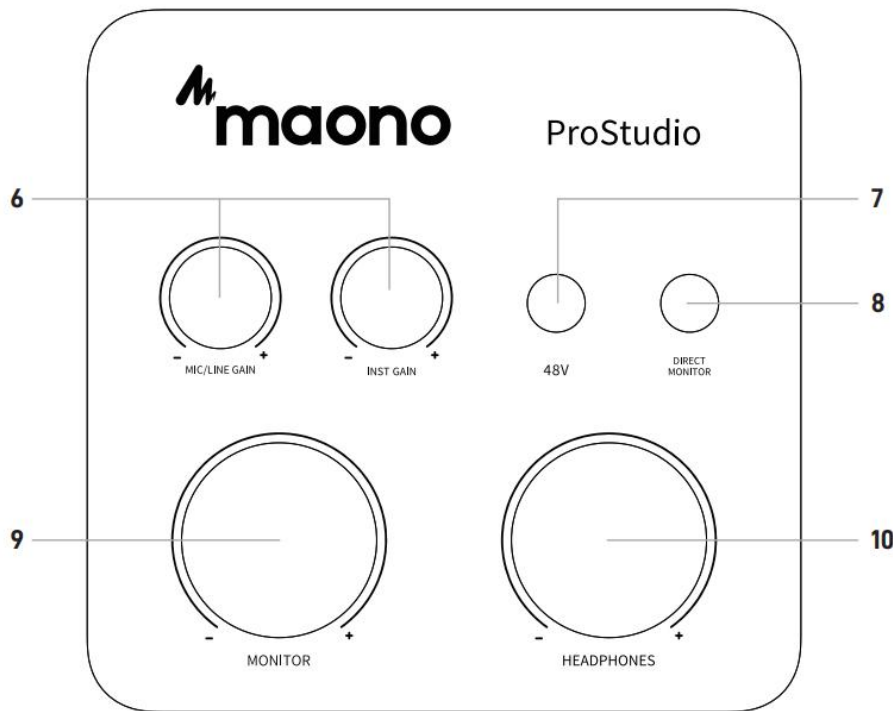

6. Mic/Line (MIC1) and Instrument (MIC2)

Gain Knobs and LED Indicators

7. 48V Phantom Power Switch and LED

Indicator


8. Direct Monitor Switch and LED Indicator

9. Monitor Level and LED Indicator

10. Headphone Level and LED Indicator



PS22 Lite-Routing Software

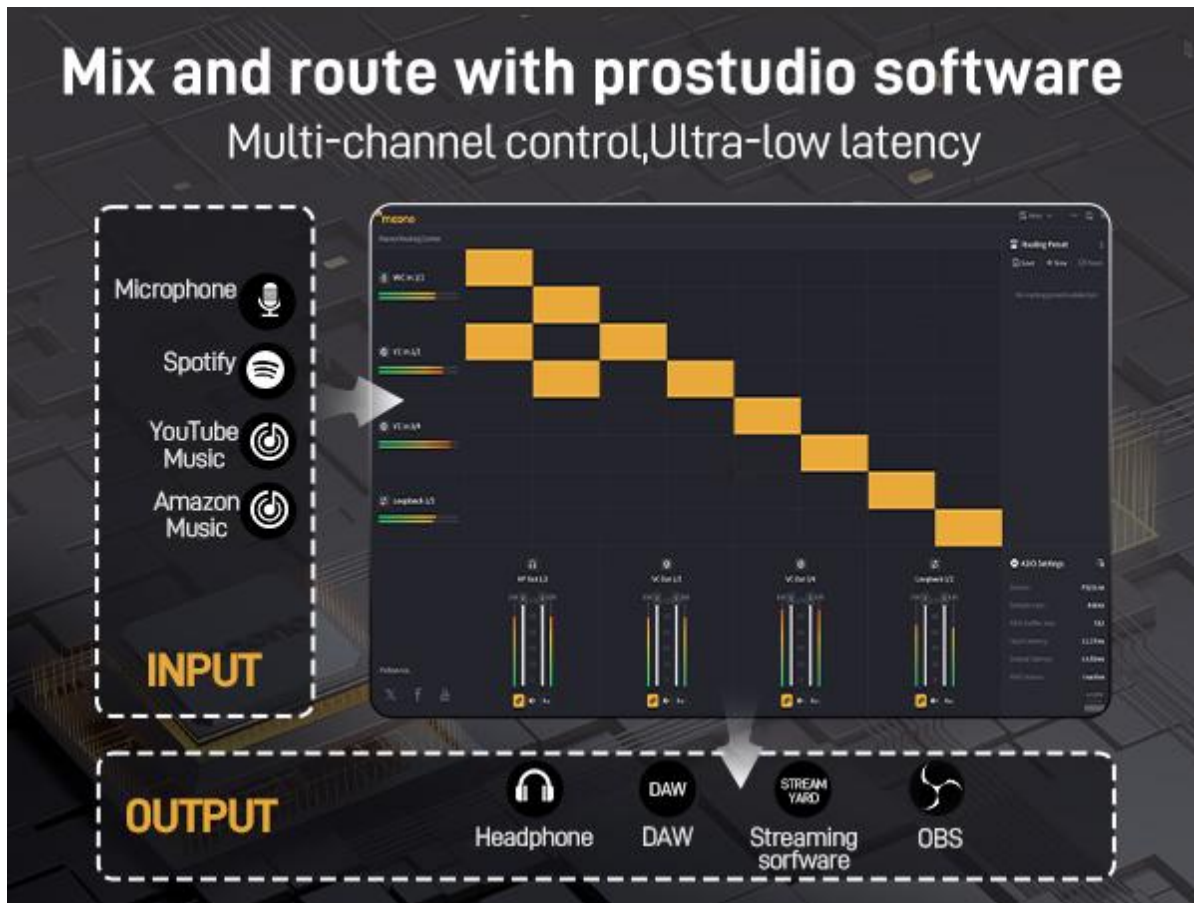



PS22 Lite Features



ProStudio 2x2 Lite USB Audio Interface

- Direct Monitoring Switch
- 2-in/2-out configuration
- Advanced routing software
- 24-bit/192 kHz sample rate
- Support 48V Phantom Power
- ASIO driver, Ultra Low Latency
- Mic preamps with up to 56dB of gain range
- Four virtual channels and two loopback channels
- USB-C bus powered(Provides both data transfer and power)



Personal Studio



Home Recording



www.maono.com