

Typhur

Connect and Cook with Confidence



Sync Dual Wireless Thermometer

All the benefits of a traditional wireless thermometer plus a unique standalone Smart Base that can be used to set desired temperatures and monitor your cooks.

The Smart Base Does it All

Our innovative Smart Base charges the probes, acts as a WiFi bridge and allows you to control and monitor your cooks without being tethered to your phone.

Stay Connected

Our innovative, patented antenna design combined with Bluetooth 5.3 technology provides double the signal strength of most wireless thermometers. Never ruin your cooking again.

Dare to Compare

Packed with cutting-edge features that outshine the competition. Using patented technology that provides the most stable connections, the Sync offers the precision and stability that others can't match.

We Don't Just Claim Accuracy, We Back it Up

With two ultra-thin probes and six optimally positioned sensors for higher accuracy. Every Sync is verified accurate by NIST to $\pm 0.5^{\circ}\text{F}$ ($\pm 0.3^{\circ}\text{C}$). A calibration certificate is included with every Sync, guaranteeing accuracy for a lifetime.



Wireless Thermometers Just Got Smarter

Heat resistant up to 400°C

Probes are waterproof to IPX8

Unlimited distance when using the app

50 hour battery life

predictive algorithm knows when your
food will be done

Durable Zirconia, T-shaped handles

Structure & Specifications

Probe Structure

- ① 1 x Ambient Temperature Sensor(Max 400°C)
- ② 5 x Internal Temperature Sensors(Max 105°C)
- ③ Safety Notch
- ④ Stainless Steel Probe Body
- ⑤ High-density Zirconia Ceramic Handle

Bluetooth V5.3

Obstructed: 135ft/40m(enclosed cookware)

Unobstructed: 400ft/120m(in open space with light obstacles)

Accuracy

Internal: $\pm 0.3^{\circ}\text{C}$

Diameter


5mm

Material

Stainless Steel, Ceramic

Water Resistance

IPX8

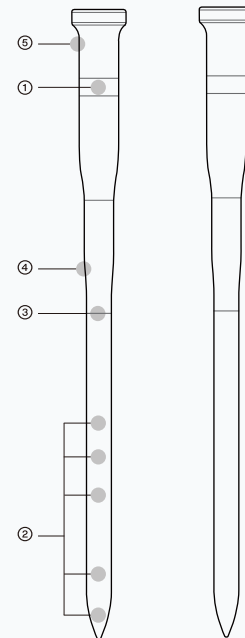

Base Structure

- ① 2.0" LCD Screen(Sync One)
- ① 2.4" TFT Screen(Sync Dual)
- ① 3.5" TFT Screen(Sync Quad)
- ② Touch Capacitive Control
- ③ Type C USB(5V 1400mA minimum required)
- ④ Probe Icon(Identify each Probe through the number)
- ⑤ Stand

Connectivity

Bluetooth V5.3

Wi-Fi (2.4GHz only)

Rechargeable Battery

3.7 volt 2,000 mAh(Sync One)

3.7 volt 2,900 mAh(Sync Dual)

3.7 volt 2,900 mAh(Sync Quad)

Materiali

Aluminum Alloy, Plastic, Rubber

Sleep Mode

Supported

